

MINIATURE LEVEL SWITCH

SIDE MOUNTED / TOP MOUNTED (POLYPROPYLENE)

MODEL CODE : ELJ


SPECIAL FEATURES

- ECONOMICAL
- STURDY AND VERSATILE
- EASY INSTALLATION
- REQUIRE VERY LESS SPACE

APPLICATIONS

- STORAGE, RECEIVER AND
- DISTRIBUTION TANKS OF
- ACID, ALKALINE, CHEMICAL,
- SOLVENT, OIL & WATER ETC.

DIMENSIONS - STANDARD VERSION

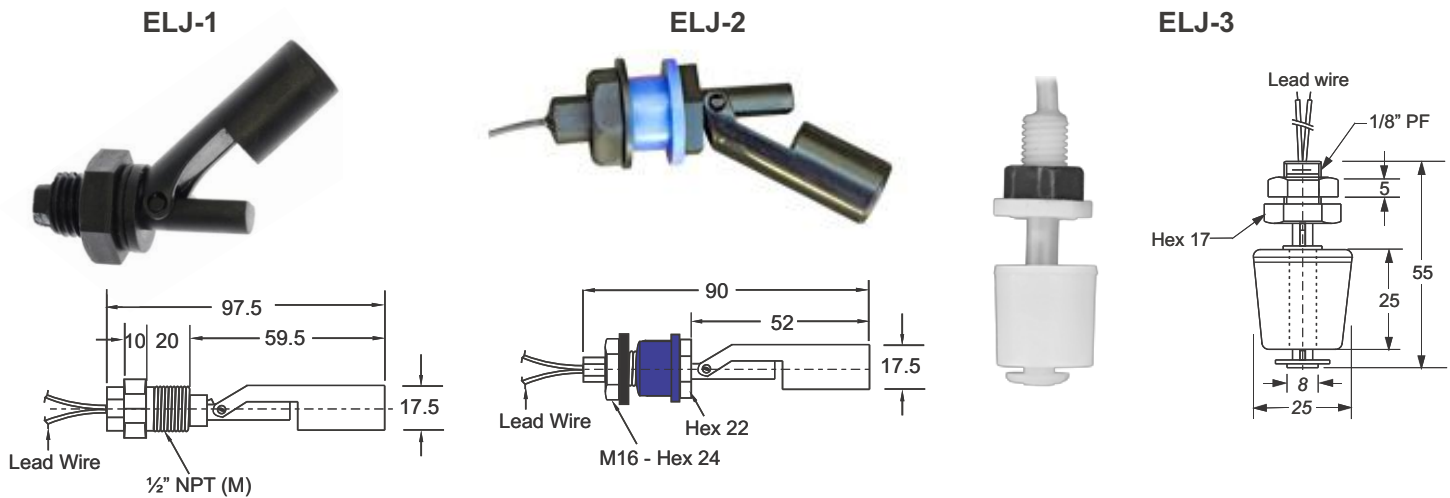

Notes : • Drawings are not to scale. • All Dimensions are in mm

SPECIFICATIONS STANDARD VERSION :

MODEL	ELJ-1	ELJ-2	ELJ-3
Mounting	Side	Side	Top
Process Connection	1/2" NPT (M)	M16	1/8" PF
Switch Type	SPST	SPST	Reversible Switching Action
Switching Capacity (Max)	50W	50W	50W
Switching Voltage (Max)	240 VAC / 200 VDC	240 VAC / 200 VDC	240 VAC / 200 VDC
Switching Current (Max)	0.5 A	0.5 A	0.5 A
Carrying Current (Max)	1 A	1 A	1 A
Lead Wire	XLPE Insulated, 23 SWG	XLPE Insulated, 23 SWG	PVC Insulated, 23 SWG
Max. Operating Pressure	4 bar	4 bar	4 bar
Max. Operating Temperature	-20 to 80°C	-20 to 80°C	-20 to 80°C
Material	Polypropylene	Polypropylene	Polypropylene
Suitable Specific Gravity	0.75	0.75	0.7
Weight (Approx.)	35 gms	35 gms	15 gms

HOW TO ORDER

Ordering Example: ELJ1, ELJ2 OR ELJ3

Note : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing.

Modifications may take place and materials specified may be replaced by others without prior notice.